


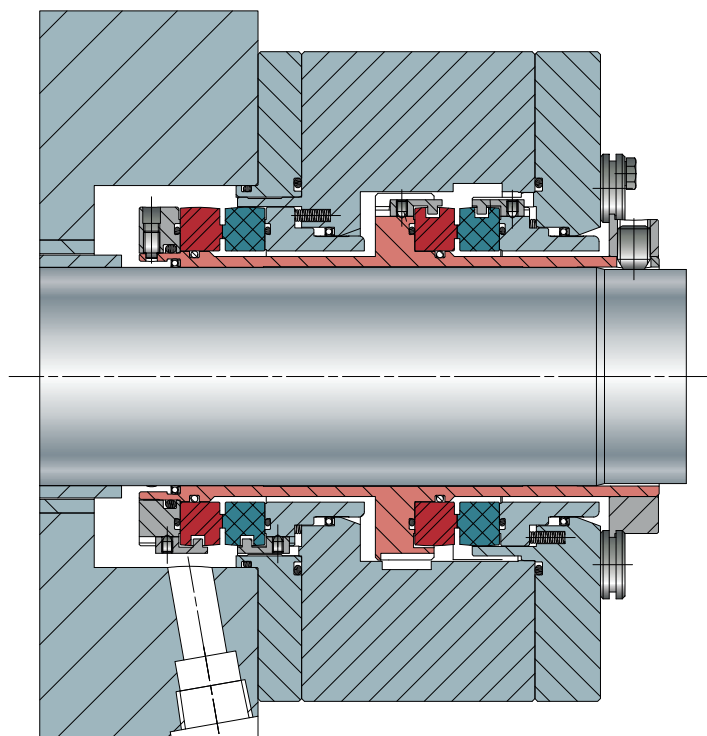

FEATURES

1. Dual seal (**2CW-CW**) “engineered” pre-assembled unit with flange and sleeve, for quick and easy installation
2. Monolithic sliding faces and geometry developed with FEM to minimize deformations at high pressures and temperature variations. Patented drive system, which does not have bad influence on ring structure
3. Insensitive to shaft deflections due to stationary design
4. Increase operational performance and reduce maintenance cost
5. Different materials available for mechanical seals and metal parts
6. Available solution with secondary seal suitable for dry running for Plan 65, 75 or 76

RECOMMENDED PLAN

Product side: 01,02,03,11,12,13,14,21,22,23,31,32,41.

Buffer side: 52,55

Operating Conditions

DIAMETER [mm]	30-150
SPEED [m/s]	0-40
TEMPERATURE [°C]	-40 - 300
PRESSURE PROCESS [bar]	Vacuum ÷ 150

Materials

Sliding Face: Silicon Carbide (U31, U41); Carbon (Z11, Z31); Carbon impregnated silicon carbide (ZU3)

Secondary Seal: FKM (V); EPDM (D); FFKM (G720); Energized PTFE (T3)

Springs: Hastelloy C (I)

Other metal parts: 316 ss (E), Duplex (E3), Superduplex (E7), Hastelloy (I)

Recommended applications

- Oil & Gas
- Petrochemical
- Chemical
- Power

HPKL

Secondary seal suitable for dry running and **PLAN 65,72,75 or 76**